




\*Terms & Conditions Apply (5 YEAR/3000 HOURS)

## 6075 4WD

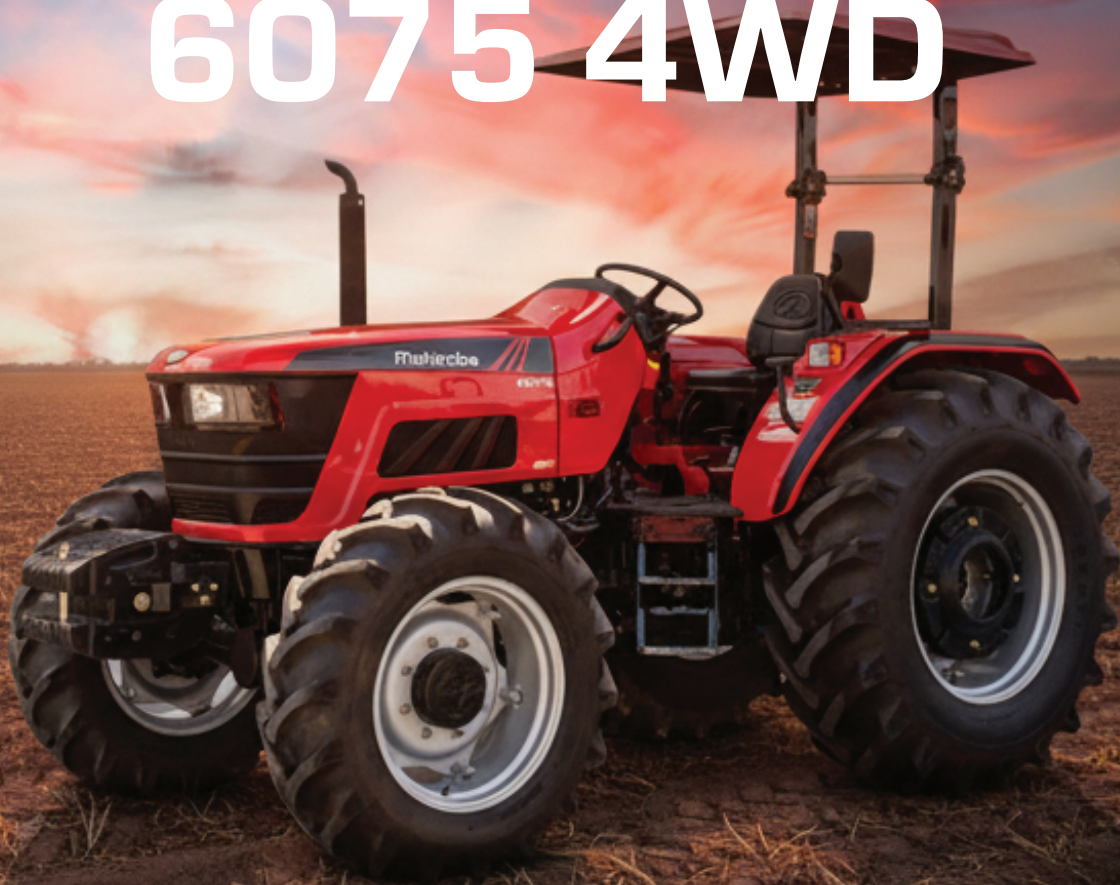

Engine Type	4-cylinder, direct injection diesel, turbocharged
Max Engine Power	75 hp (56 kw)
Rated Engine Speed (rpm)	2100
Cylinders	4
Displacement	3822 cc
Fuel Tank Capacity	60 L
Number of Gears	15 F + 15 R
Tractor min and max speed	1,64 km/h - 32,31 km/h
Clutch Type	Dry dual, mechanically controlled / 12 inch
Three-Point Linkage	Cat II telescopic lower link with stabilizers
Max PTO Power	66 hp
PTO Speeds (rpm)	540 / 540E & SLIPTO Lever
Standard Tyres (Front)	12.4 x 24
Standard Tyres (Rear)	18.4 x 30
Turning Radius with Brakes (mm)	3800 mm
Turning Radius without Brakes (mm)	4200 mm
ROPS	Standard
Brake Type	Oil immersed brakes (OIB) brakes foot operated, independently with provision of interlock, Hand brake

Transmission Type	Synchro Speed Gears with forward-reverse Synchro Shuttle
Steering Type	Hydrostatic power
Steering Pump Output	17 l/min
Max Lift Capacity (Lower Link)	2900 kg
Hydraulic Pump Output	58 lpm
Steering Pump Output	17 lpm
Auxiliary Remote Valves	2-spool standard
Cab with A/C	N/A
Front Axle / 4WD	Mechanical engagement, limited slip differential
PTO Type	6-spline, 2-speed, single lever independent
Overall Length (mm)	4052 mm
Overall Width (mm)	1990 mm
Overall Height (mm)	2670 mm
Ground Clearance (mm)	350 mm
Wheelbase (mm)	2220 mm
Hydraulic System	Full-live with position & draft control, dual spool auxiliary
Total Weight (kg)	3400 kg

